



---

Verona



**SANREMO**  
COFFEEMACHINES

*made in italy*

# Verona



124 C° 10:00  
SANREMO

## TIME AND TEMPERATURE DISPLAY

only mod. SED



### SED VERSION

Guarantees an electronic dosing system through the button panel



### SAP VERSION

Allows the semi-automatic programming of doses

### GROUP SR 61

Optimized to maintain the ideal coffee extraction temperature



Verona  
Download the catalog

## Characteristics



**ELECTRONIC AUTO-LEVEL**  
Through an electronic level probe the boiler is automatically filled and maintained to the right filling level.



**STATIC RELAY BOILER TEMPERATURE**  
Allows to regulate the temperature as accurately as possible.



**DOUBLE READING GAUGE**  
Allows to control at the same time the boiler pressure and the distribution pressure.



**ACTIVATED ELECTRONIC PRE-INFUSION**  
Management of the delayed activation of water solenoid in the first phase of brewing.



**MULTIFUNCTION DISPLAY**  
Allows to monitor the right functioning of the machine and to program the main functions.



**GROUP SR 61**  
Chromed brass grouphead with thermosiphonic circulation system optimized to maintain the ideal coffee extraction temperature.



**EASY SERVICE**  
Fast access to the internal parts for quick and easy technical service.




**AUTOMATIC CLEANING CYCLE**  
Process for coffee groups cleaning.

## Colours

	Red	RAL 3002
	Matte black	RAL 9005
	Black	RAL 9005
	Silver	RAL 9006
	Pearl white	RAL 1013
	White	RAL 9003


## Versions



32' 2/4" / 820 mm

### 2 group SED/SAP


2 steam taps  
1 water tap  
1 one-cup filter holder  
2 two-cup filter holders

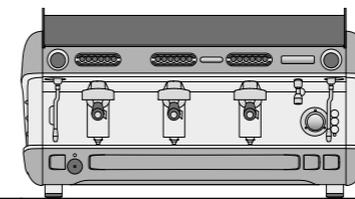

41' 2/4" / 1050 mm

### 3 group SED/SAP

2 steam taps  
1 water tap  
1 one-cup filter holder  
3 two-cup filter holders

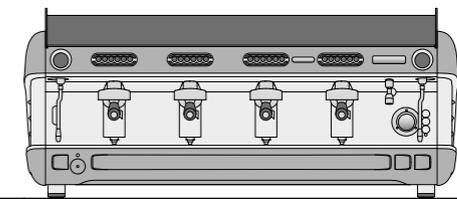


52" / 1320 mm

### 4 group SED/SAP


2 steam taps  
1 water tap  
1 one-cup filter holder  
4 two-cup filter holders

23' 1/4" / 590 mm



24" / 610 mm

3" / 78 mm



5' 3/4" / 140 mm

26" / 652 mm

### TALL VERSION

## Optional



**AUTOSTEAMER**  
Steam wand characterized by an electronic system that allows to mount and/or heat milk at the set temperature.



**COMPETITION FILTERS**  
Exclusive Sanremo design, with shape and volume designed to capture the best coffee aromas and fragrances.



**EXTERNAL VOLUMETRIC PUMP**



**MIXED INFUSION HOT WATER FOR TEA AND HERBAL TEAS**  
Immediate mixing of cold / hot water for a better chemical and organoleptic quality.

## Technical data

		2 group	3 group	4 group
voltage	V	220-240 1N / 380-415 3N		
power input	kW	3.15	5.35	6.05
steam boiler capacity	lt	12.7	19	22.6
steam boiler power	kW	2.7	5.1	5.1
pump power	kW	0.15	0.15	0.15
net weight	lb / kg	150 / 68	187 / 85	240,5 / 109
gross weight (with shipping crate)	lb / kg	161 / 73	201 / 91	254 / 115



**CUP WARMER**  
Dedicated resistor to keep all the cups at the optimal temperature.



**NAKED FILTER HOLDERS**



**ENHANCED RESISTANCE**



---

For more information about our  
coffee machines please contact us  
at [export@sanremomachines.com](mailto:export@sanremomachines.com)



**SANREMO**  
COFFEE MACHINES

SANREMO coffee machines s.r.l.  
Via Giacomo Bortolan 52  
31050 Vascon di Carbonera [TV] – ITALY  
T +39 0422 448900  
F +39 0422 448935  
[www.sanremomachines.com](http://www.sanremomachines.com)

Sanremo Coffee Machines s.r.l. has a certified Quality Management System  
according to UNI EN ISO 9001:2015 standard.



RoHS